

07/31/00  
JC896 U.S. PTO

08-01-00

By Express Mail #EL626945401US

Attorney Docket No.: 4180-66

A  
JC896 U.S. PTO  
09/629607  
07/31/00

Check box if applicable: ☐ DUPLICATE

## UTILITY PATENT APPLICATION TRANSMITTAL

*Submit an original and a duplicate for fee processing*

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Assistant Commissioner for Patents  
BOX PATENT APPLICATION  
Washington, DC 20231

Dated: July 31, 2000

Sir:

Transmitted herewith for filing is the utility patent application of:

Inventor(s): Andrea LUKAS, Harald TROCHA

For: Accessories Mount For An Electric Toothbrush

Enclosed are:

- Transmittal letter (2x) with Fee Computation Sheet
- General Authorization For Payment of Fees (2x)
- Title Page, Specification, Claims 1 to 13 & Abstract (17 pages)
- Executed Declaration and Power of Attorney (3 p.)
- Four sheet(s) of drawing(s) (Figs. 1 to 6b)
- Check for \$690 for filing fee
- Assignment of the invention to **Rowenta-Werke GmbH**
- Recordation Cover Sheet (PTO-1595)
- Certified copy of priority document No(s). 299 13 406.7
- Letter Transmitting Priority document
- Return Receipt Postcard

☐ Please charge my Deposit Account No. 03-2412 in the amount of \$\_. A duplicate copy of this sheet is enclosed.

By Express Mail #EL626945401US

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this application or credit any overpayment to Deposit Acct. No. 03-2412.

☒ Any additional filing fees required under 37 CFR 1.16.


☒ Any patent application processing fees under 37 CFR 1.17

☒ The issue fee set in 37 CFR 1.18 at 3 months from mailing of the Notice of Allowance, pursuant to 37 CFR 1.311 (b) provided the fee has not already been paid by check.

☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

☐ Priority is claimed for this invention and application, corresponding applications having been filed in **Germany** on **July 31, 1999**, No. **299 13 406.7** .

Respectfully submitted,  
COHEN, PONTANI, LIEBERMAN & PAVANE

By:   
Klaus P. Stoffel  
Reg. No. 31,668

551 Fifth Avenue, Suite 1210  
New York, New York 10176  
Tel: (212) 687-2770  
Fax: (212) 972-5487

Trial	Control	MCI	AD
1	85	75	65
2	88	78	68
3	90	80	70
4	92	82	72
5	95	85	75

•

Figure 1 consists of 12 histograms, labeled (a) through (l), arranged in a 6x2 grid. Each histogram shows the distribution of the number of species per genus (S/G) for a specific group of organisms. The x-axis for all histograms is 'Number of species per genus' with values 1, 2, 3, 4, 5, 6, 7, 8, 9, 10. The y-axis is 'Number of genera' with values 0, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100. The groups are: (a) All species, (b) All genera, (c) All species, (d) All genera, (e) All species, (f) All genera, (g) All species, (h) All genera, (i) All species, (j) All genera, (k) All species, (l) All genera. The distributions are generally unimodal and right-skewed, with a peak at 1 species per genus.

**Inventors:**     **Andrea LUKAS**  
                  **Harald TROCHA**

## **BACKGROUND OF THE INVENTION**

### **Field of the Invention**

The invention relates to a mechanically driven device for cleaning the oral cavity, in particular an electric toothbrush, and to an accessories mount for a device of this type.

### **Discussion of the Prior Art**

Electric toothbrushes generally comprise a handpiece, in which the electric drive means are accommodated, a brush head and a spindle which connects the handpiece to the brush head.

An electric toothbrush of this generic type is known from European reference EP 0 850 602, which was filed in the name of the present applicant. This toothbrush essentially comprises a handpiece, a brush head, a pin which connects the handpiece to the brush head and a motor which is arranged in the handpiece and sets an unbalanced mass in rotation. The unbalanced mass is arranged in the vicinity of the brush head and is set in rotation by an elongate pin which is coupled to the output spindle of the drive motor. The housing part which bears the drive means is attached to the handpiece via damping means in order to prevent vibrations in the handpiece. During use, the rotary movement of the unbalanced mass generates a centrifugal force which in turn, in the brush head, generates vibrations which are damped in the handpiece.

This device comprises a brush which is arranged at the end of the brush head in order to clean the oral cavity. Although the way in which it functions is satisfactory, the used brushes cannot be replaced since they remain fixedly connected to the device.

Toothbrushes with removable brushes are already known from the prior art. According to some proposals, the brushes are removably attached to the end of the brush head, while according to other proposals they are connected to a mount which is arranged removably on the pin which connects the brush to the drive mechanism. In both cases, there are sealing problems, since the water and toothpaste can penetrate into the interior of the device; for design reasons, the attachment parts are connected to drive parts of the toothbrush which are arranged in the interior. In addition, only the brush is exchanged, while its mount remains attached to the device, and for this reason hygiene requirements are no longer satisfied if it is intended for the device to be used by another person as well.

## **SUMMARY OF THE INVENTION**

Therefore, one object of the invention is to eliminate the above-mentioned drawbacks and to provide an electric toothbrush which is fitted with an accessories mount, in which the used brushes can be replaced easily and in which the required hygiene conditions are satisfied in the event of use by different people.

Another object of the invention is to provide an accessories mount for electric toothbrushes to which different accessories for cleaning the oral cavity can be removably and therefore exchangeably attached.

A further object of the invention is to provide an accessories mount of simple structure for electric toothbrushes, which is easy to fit to the device and to remove again from the device, which functions reliably and which can be manufactured as a mass-produced item at the lowest possible price.

According to the invention, these objects are achieved by means of an accessories mount for electric toothbrushes which is equipped with a motor arranged in the handpiece for driving the means which generate the vibrations in the brush head. The means which generate the vibrations are arranged in the interior of an elongate protective cover which is attached to the handpiece. The accessories mount comprises a sleeve which is fitted onto the protective cover and covers the latter over at least part of its length.

The means which generate the vibrations in the brush head, in particular the unbalanced mass and the spindle which sets the unbalanced mass in rotation, are arranged in the interior of the elongate protective cover, one end of which is fixedly connected to the handpiece of the device and the other end of which is arranged freely. The protective cover is designed as a closed part for sealing reasons. In addition, the accessories which are provided for cleaning the oral cavity are held by an accessories mount which is substantially formed by a sleeve surrounding the protective cover.

This has the advantage that all the components of the vibration mechanism are arranged in a hidden and encapsulated position and therefore do not come into contact with the fingers of the user. A protective cover of this type made from plastic also provides additional protection for people who are sensitive to metal. In addition, this solution ensures that there is a good seal against water and toothpaste, since the protective cover is designed as a closed part.

Another advantage is that each user has his own accessories mount, the length of the sleeve corresponding to the length of introduction into the oral cavity. As a result of the user changing the sleeve, at the same time the accessory is changed and therefore the outer surface of the protective cover which supports the sleeve remains clean.

The sleeve advantageously covers the protective cover over its entire length which projects beyond the handpiece.

The protective cover is thus protected by the appropriate sleeve which has been fitted during use over its entire length and is not exposed to contamination by cleaning liquid flowing along the sleeve.

The bottom end of the protective sleeve is advantageously connected to the handpiece by means of an elastic ring.

In an electric toothbrush as described in EP 0 805 602 which has been filed in the name of the applicant, the unbalanced mass is advantageously arranged in the vicinity of the brush head. The unbalanced mass is advantageously set in rotation by an elongate spindle, and the driving force of the motor is transmitted to the spindle via a flexible coupling arranged in the vicinity of the brush head. The fact that the rotation point is at a distance from the load point, in particular from the center of gravity of the unbalanced mass, increases the amplitude of the vibrations. The elastic ring which connects the end of the protective cover to the handpiece ensures that the vibrations are magnified in the brush head and are attenuated in the handpiece.

Preferably, the sleeve at its one end has attachment means for releasable attachment to the protective sleeve and, at its other, opposite end, has holding means for the accessories provided for cleaning the oral cavity.

The means for attaching and locking the sleeve on the protective cover are provided at a distance from the region which receives the toothpaste, so that the toothpaste cannot contaminate the locking mechanism and no functional problems occur.



The end of the sleeve which bears the accessories is advantageously oriented obliquely with respect to the longitudinal axis of the sleeve.

This configuration offers the advantage that the brush can be passed to the mouth in an ergonomic way, depending on the way it is handled by the user, but the mechanism accommodated in the protective cover remains aligned in a straight position. In addition, this obliquely oriented configuration exhibits good mechanical strength.

The angle between the end region of the sleeve and its longitudinal axis is advantageously between  $8^{\circ}$  and  $20^{\circ}$ , preferably  $15^{\circ}$ . It has been found that an optimum ergonomic design is achieved with an angle of inclination of this magnitude.

The means for holding the accessories are advantageously formed by a part which has an opening for receiving the accessories.

It is thus possible to insert various types of exchangeable accessories which have pegs with a suitable cross-sectional shape into the mount, with the accessories, in the most simple design in particular, being pressed into the receiving opening. The clear width of the receiving opening is advantageously of polygonal, preferably square design.

This has the advantage of providing a simple and reliable holding and locking means, the peg of the accessory being clamped into the receiving opening.

The receiving opening is preferably of continuous design.

In this way, it is possible for the accessory to be attached to one side or the other of the accessories mount, as desired.

According to a preferred embodiment of the invention, the accessory is formed by an oval brush. A brush of this type can be guided to the teeth in such a way that its larger diameter is oriented either parallel or perpendicular to the row of teeth, depending on the intended purpose, in particular that of cleaning the teeth, massaging the gums, etc.

According to another embodiment of the invention, the accessory is formed by a rotary piece with a conical tip. Such an accessory can be used in conjunction with an accessories mount according to the invention, preferably for cleaning the interdental spaces and the gum line.

According to another embodiment of the invention, the accessory may be formed by dental floss which is secured in a holder.

It is also possible for a dental-floss holder to be fitted to an accessories mount according to the invention, in which case the dental floss is arranged in a fixed position in the holder but it is possible to exchange the dental-floss holder or to attach it in an inclined position on one or the other side of the accessories mount.

The various features of novelty which characterize the invention are pointed out with particularity in the claims annexed to and forming a part of the disclosure. For a better understanding of the invention, its operating advantages, and specific objects attained by its use, reference should be had to the drawing and descriptive matter in which there are illustrated and described preferred embodiments of the invention.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

- Figure 1 shows a front view of an electric toothbrush with an accessories mount according to the invention;
- Figure 2 shows a front view of an accessories mount according to the invention;
- Figure 3 shows a section on line A-A from Figure 1, through an accessories mount which is fitted on the toothbrush head;
- Figures 4a and 4b show different arrangements of accessories and a plurality of individual accessories which can be used with the accessories mount according to the invention;
- Figure 5 shows an exploded view of the various components of an accessories mount according to the invention; and
- Figures 6a and 6b show embodiments of an accessories mount according to the invention, with an oval brush in two different positions on the accessories mount.

## **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

The electric toothbrush 1 illustrated in Figure 1 comprises a handpiece 2 and a brush head 4, onto which an accessories mount 3 according to the invention has been fitted. The handpiece 2 accommodates an electric motor and a flexible connecting piece which connects the motor spindle to the brush head spindle 10.

The brush head spindle 10 is formed by an elongate pin, in which the bottom end of the spindle 14 of an unbalanced mass 16 is secured. The top end of the spindle 14 is fitted into a corresponding opening in an elongate protective cover 18. The brush head spindle 10 is made in particular from plastic, while the spindle 14 and the unbalanced mass 16 are made from metal. The unbalanced mass 16 is advantageously semicircular in cross section, the center of the semicircle lying on the spindle 14. At its two ends, the spindle of the unbalanced mass 16 is secured removably with respect to the adjacent parts. However, it is also possible to provide a fixed holder or for the pin 10, the unbalanced-mass spindle 14 and the unbalanced mass 16 to be designed as a single part.

The cover 18 on one side bears the spindle 14 of the unbalanced mass 16, the pin 10 setting the unbalanced mass 16 in rotation. On the other side, the cover 18 contains all the components so as to seal them in. The protective cover 18 is fixed into the handpiece 2, the elastic sealing ring 7 ensuring a seal. This allows the electric toothbrush to be of compact and sealed design.

The accessories mount 3 according to the invention is fitted onto the protective cover 18 and connected to the latter via attachment means 28 on the brush head 4. The accessories mount 3 comprises a sleeve 20, the top end 20b of which is equipped with means 26 for holding the accessories which are required to clean the oral cavity and the bottom end of 20a which is equipped with the attachment means 28 for attaching it to the cover 18 or the toothbrush head 4.

To ensure a firm and rotationally secure connection between the sleeve 20 which bears the accessory and the protective cover 18, the protective cover 18 has a flattened top end 17 on one side, which interacts with a corresponding opening in the interior of the sleeve 20 of the accessories mount 3. On the other side, the protective cover 18 has a bottom end which is provided with two cutouts 19.

The means 28 for attaching the sleeve 20 to the protective cover 18 comprise, as can be seen from Figure 3, a slide ring 32 which can slide along the bottom end of the sleeve 20 and is provided with two elastic tongues. The slide ring 32 is arranged in such a way that it is guided displaceably between two limit stops. The bottom limit stop corresponds to the locking position, in which the sleeve 20 is fixed on the protective cover 18. The top limit stop corresponds to the open position, in which the sleeve 20 can be removed from the protective cover 18.

The top end 20b of the sleeve 20 which forms the accessories mount 3 advantageously comprises an obliquely oriented section 21 with the holding means 26 arranged in its end region for various accessories 22, 22' for cleaning the oral cavity. The angle of inclination of the section 21 is 8° to

20°, advantageously 15°, so that the accessories mount 3 is oriented obliquely forward or backward and the corresponding accessory 22 can thus be introduced into the mouth at an angle.

As can be seen from Figure 5, the attachment means 26 are formed by a part 27 which is connected to the end section 21 of the sleeve 20. The part 27 may be of removable design and provided with attachment means for attaching it to the sleeve 20. However, the part 27 is advantageously formed integrally with the sleeve 20. The part 27 has a continuous receiving opening 27' into which the accessories 22, 22' are fitted.

The opening 27' is preferably of square design, but can alternatively be of any other polygonal or even, in extremis, circular shape. The accessory 22, 22' which is fitted into the opening 27' has a peg or pin 24 which matches the shape of the opening 27'. The accessories 22, 22' are removably attached to the sleeve 20, in particular by being clamped, being pressed in, by elastic means, by screw connection or by equivalent attachment means. Preferably, the accessories are attached by being clamped in an elastic holder.

All the components of the accessories mount 3, in particular the sleeve 20, the slide ring 32 and the accessories which are attached in the accessories mount 3 are advantageously made from plastic, which is beneficial for people who are allergic to metallic materials and allows mass production at low prices.

During use, an accessory 22 or 22' is fitted into the sleeve end 21, then the sleeve 20 is fitted onto the protective cover 18, and the slide tube 32 is moved downward in order to lock the sleeve

(20) on the brush head 4. By pressing the on-off switch 8, the electric motor which sets the spindle 10 and the unbalanced mass 16 in rotation is turned on. The spindle 10 is set in rotation via a flexible coupling arranged in the interior of the handpiece 2, so that vibrations occur around a rotation point located in the handpiece 2, and these vibrations are amplified because of the distance from the center of gravity of the unbalanced mass 16. Due to the elastic sealing ring 7, the vibrations maintain their amplitude in the brush head and are attenuated in the handpiece 2.

The rotary movement of the unbalanced mass 16 generates the vibrations in the brush head 4, the vibrations being transmitted to the accessory 22, 22' which is attached to the top end of the accessories mount 3. The vibrating accessory comes into contact with the teeth and/or the gums in order to clean the teeth and massage the gums.

As can be seen from Figures 4a and 4b, the accessories attached to the accessories mount may be toothbrushes of various forms, in particular oval 22 or conical 22' brushes which are used in particular to clean and care for the interdental spaces. It is also possible to use other accessories, for example dental floss which is secured in a holder which can be removed from the accessories mount 3.

Figures 6a and 6b show the way in which an accessories mount 3 according to the invention is used with an oval brush 22. The part which serves as holding means 26 comprises, as can be seen from Figure 5, a square attachment opening 27'. Since the peg 24 of the brush 22 is square in cross section, there are two different options for attaching the oval brush 22 to the accessories mount 3. Either the brush 22 is fitted on in such a way that its larger diameter is oriented parallel



to the row of teeth (Figure 6a) or the brush is rotated through 90° with respect to the first position (Figure 6b). Since the receiving opening 27' is of continuous design, the sleeve 20 has an obliquely oriented section 21 and can be attached to the cover 18 in two different orientations rotated through 180°, it is thus possible for an oval brush to assume eight different positions on the accessories mount.

Further improvements can be made within the scope of the invention. For example, it is possible to provide an uncoupling device which separates the brush from the holder if an excessive pressure is exerted on the brush. The brush is attached to a seat by means of a spring arranged in its holder, the holder being arranged in the accessories mount according to the invention. In the event of a defined pressure being exceeded, the brush would be separated from its seat, so that it is no longer connected to the vibration means.

It is also possible to provide an accessories mount 3 with slide rings of different colors in order to identify the accessories mount as a function of a specific use.

The invention is not limited by the embodiments described above which are presented as examples only but can be modified in various ways within the scope of protection defined by the appended patent claims.

## IN THE CLAIMS


We claim:

1. An accessory mount for an electric toothbrush having a motor which is arranged in a handpiece for driving vibration-generating means, comprising: an elongate protective cover attachable to the handpiece, the vibration-generating means being arrangeable in an interior of the elongate protective cover; and a sleeve fitted onto the protective cover so as to cover the protective cover over at least part of its length.
2. An accessory mount as defined in claim 1, wherein the sleeve covers the protective cover over approximately its entire section which projects beyond the handpiece.
3. An accessory mount as defined in claim 1, and further comprising an elastic ring arranged to connect a bottom end of the protective cover to the handpiece.
4. An accessory mount as defined in claim 1, and further comprising attachment means at one end of the sleeve for removably attaching the sleeve to the protective cover and, holding means at an opposite end of the sleeve for holding the accessories for cleaning an oral cavity.
5. An accessory mount as defined in claim 4, wherein the opposite end of the sleeve is oriented obliquely with respect to a longitudinal axis of the sleeve.


6. An accessory mount as defined in claim 5, wherein the angle between an end region of the sleeve and the longitudinal axis is  $8^{\circ}$  to  $20^{\circ}$ .
7. An accessory mount as defined in claim 4, wherein the holding means includes a part which has a receiving opening for accommodating the accessories.
8. An accessory mount as defined in claim 7, wherein the receiving opening has a clear width of polygonal shape.
9. An accessory mount as defined in claim 8, wherein the clear width is square.
10. An accessory mount as defined in claim 7, wherein the receiving opening is of continuous design.
11. An accessory mount as defined in claim 4, wherein the accessory is an oval brush.
12. An accessory mount as defined in claim 4, wherein the accessory is formed by a rotary piece with a conical tip.
13. An accessory mount as defined in claim 4, wherein the accessory is a holder in which dental floss is secured.

### **ABSTRACT OF THE DISCLOSURE**


An accessory mount for an electric toothbrush having a motor which is arranged in a handpiece for driving vibration-generating mechanism. The mount including an elongate protective cover attachable to the handpiece. The vibration-generating mechanism is arrangeable in an interior of the elongate protective cover. A sleeve is fitted onto the protective cover so as to cover the protective cover over at least part of its length.

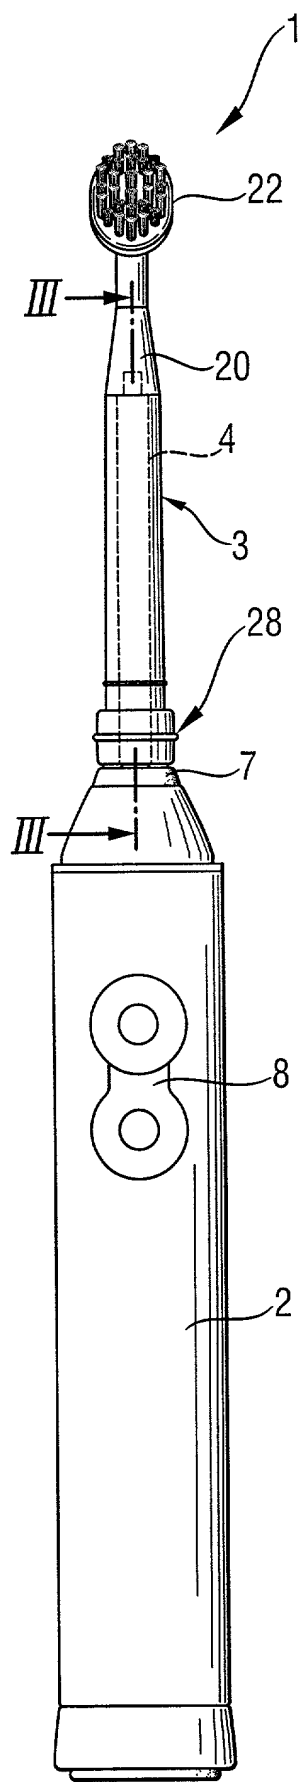


**Fig. 2**

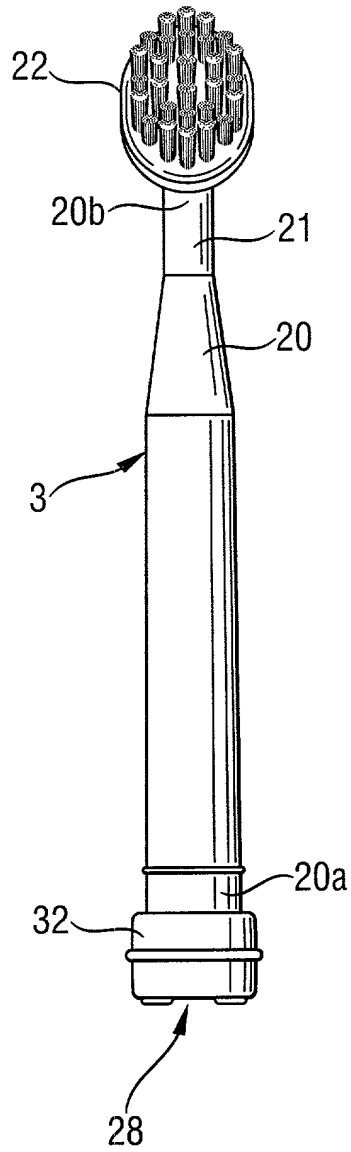


**Fig. 3**

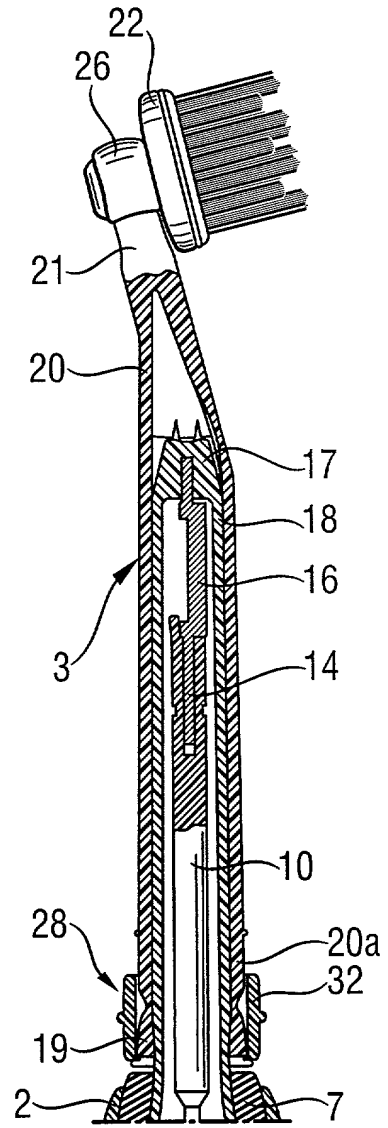


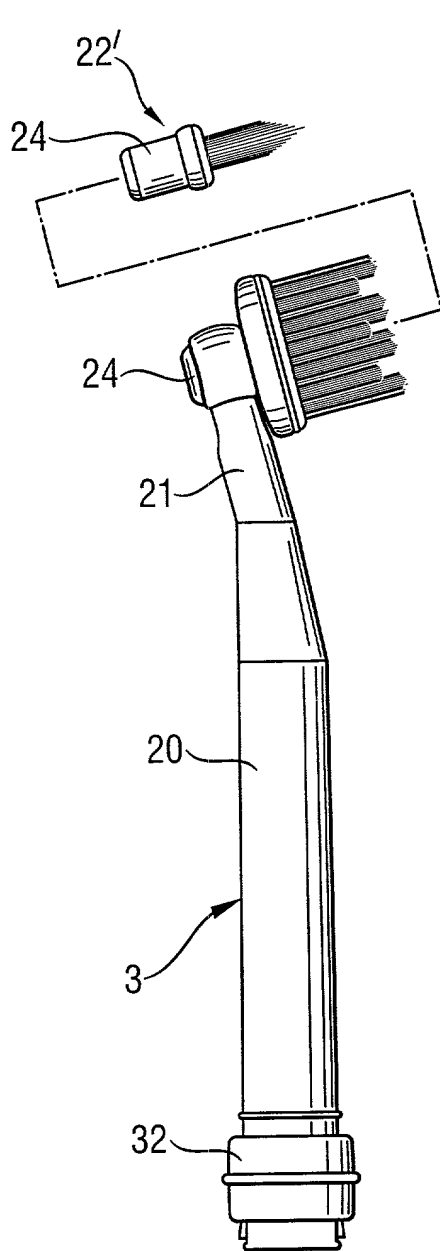


**Fig. 4a**

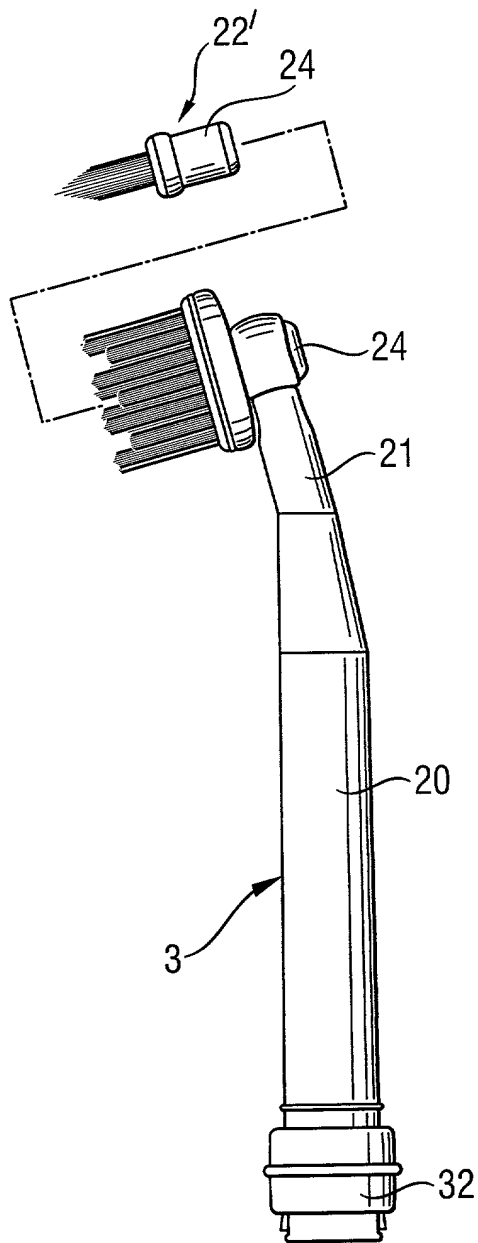


**Fig. 4b**

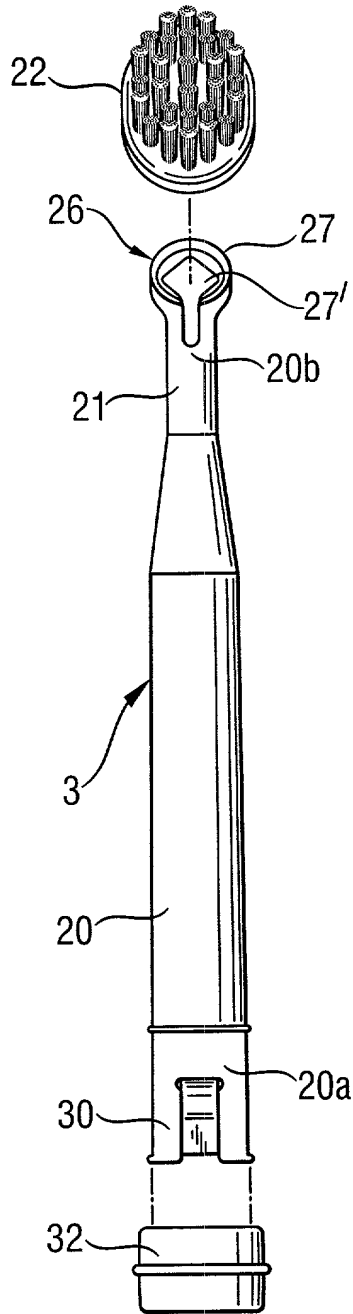

**Fig. 5**

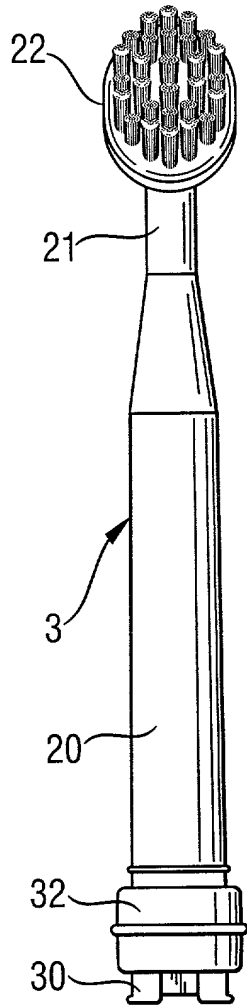

**Fig. 6a**

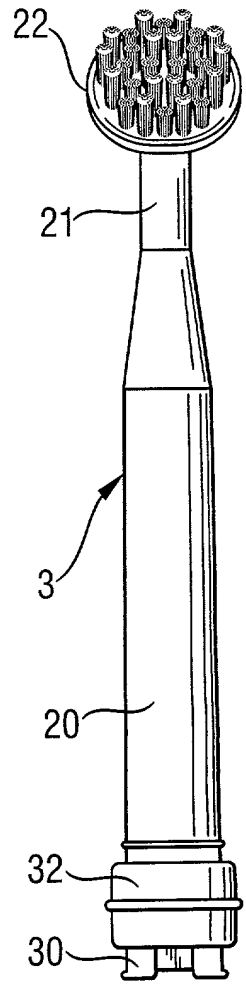

**Fig. 6b**



By Express Mail  
No. EL626945401US

## DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### ACCESSORIES MOUNT FOR AN ELECTRIC TOOTHBRUSH

the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I also acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37 CFR 1.63(d), which occurred between the filing date of the prior application and the filing date of the continuation-in-part application, if this is a continuation-in-part application.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<b>Prior Foreign Application:</b>	<b>Country:</b>	<b>Germany</b>
	<b>Appln. No.:</b>	<b>299 13 406.7</b>
	<b>Filed:</b>	<b>July 31, 1999</b>

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

MYRON COHEN, Reg. No. 17,358; THOMAS C. PONTANI, Reg. No. 29,763; LANCE J. LIEBERMAN, Reg. No. 28,437; MARTIN B. PAVANE, Reg. No. 28,337; MICHAEL C. STUART, Reg. No. 35,698; KLAUS P. STOFFEL, Reg. No. 31,668; EDWARD M. WEISZ, Reg. No. 37,257; JULIA S. KIM, Reg. No. 36,567; VINCENT M. FAZZARI, Reg. No. 26,879; ALFRED W. FROEBRICH, Reg. No. 38,887; KENT H. CHENG, Reg. No. 33,849; GEORGE WANG, Reg. No. 41,419; TZVI HIRSHAUT, Reg. No. 38,732; GERALD J. CECHONY, Reg. No. 31,335; ROGER S. THOMPSON, Reg. No. 29,594 and JOY I. FARBER, Reg. No. 44,103.

Address all telephone calls to Klaus P. Stoffel, Esq. at telephone No. (212) 687-2770.

Address all correspondence to:

Klaus P. Stoffel, Esq.  
Cohen, Pontani, Lieberman & Pavane  
551 Fifth Avenue, Suite 1210  
New York, New York 10176

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor: **Andrea LUKAS**

Inventor's signature: Andrea Lukas

Date: 07/27/2000  
Month/Day/Year

Residence: **Ludwigstraße 68  
D-63067 Offenbach  
Germany**

Citizenship: **Germany**

Post Office Address: **Ludwigstraße 68  
D-63067 Offenbach  
Germany**

